
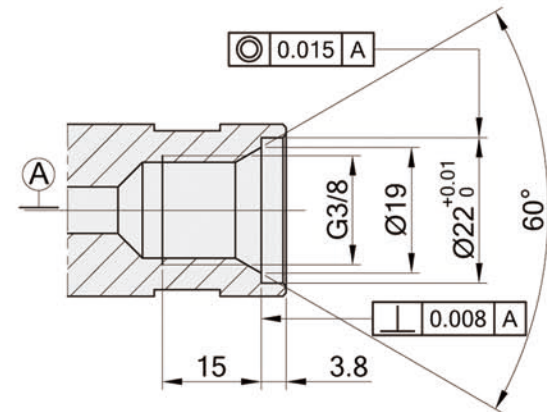
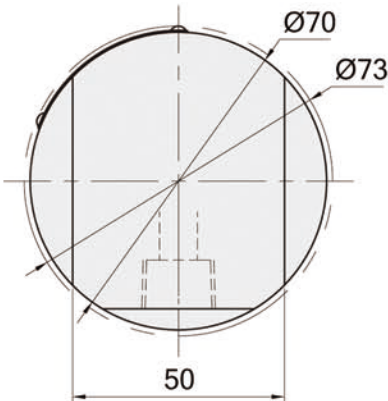



Rev:	Date:	By	Chk	Description
A.1	9/18/12	PJE	RAW	EC0 0045
A.2	10/06/12	JWW	PJE	EC0 0192

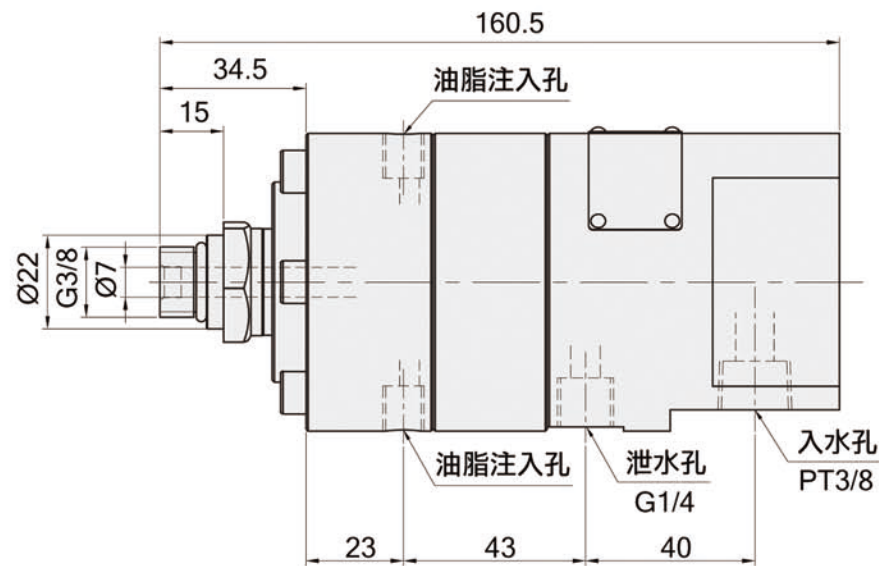

配套轴安装要求

技术参数：
最高转速：500rpm
最高温度：125℃
工作压力：500BAR
介质： 切削液

THIRD ANGLE PROJECTION:



Drawn	JSM	6/2/03	TOLERANCE EXCEPT AS NOTED
Checked	PJE	13/43/05	x.x ±.125
Checked	PJE	11/36/08	x.xx ± 0.15
CUSTOMER APPROVAL/DATE:			x.xxx ± 0.005
			ANGLES ± 0.5°
THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO DYNAMIC SEALING TECHNOLOGIES,INS (HIDENY) NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT OR IT IS CONTENTS,IN SHOLE OR PART SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDNEY			SHAFT MEL/PLTING: CARBON STL 94-62 RC BLK OXIDE
			SHAFT MEL/PLTING: CARBON STL BLK OXIDE

HIDNEY

深圳市欣德利机电设备有限公司

TEL:0755-27222664

CUSTOMER:

STOCK

P/N:

REV:

A 4