
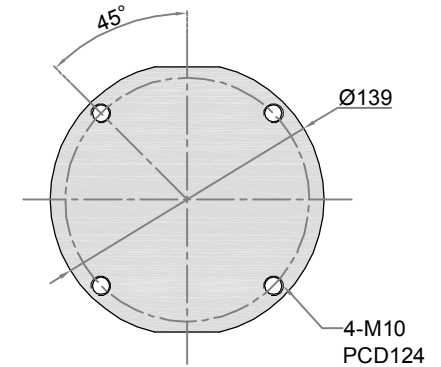
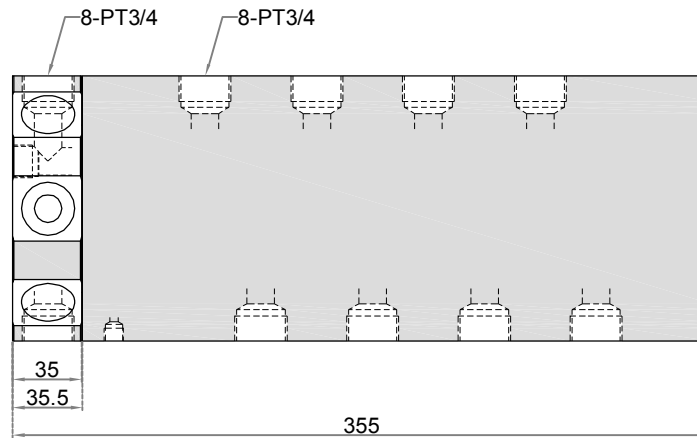


# SHEET1

| Rev: | Date:    | By  | Chk | Description |
|------|----------|-----|-----|-------------|
| A.1  | 9/18/12  | PJE | RAW | EC0 0045    |
| A.2  | 10/06/12 | JWW | PJE | EC0 0192    |

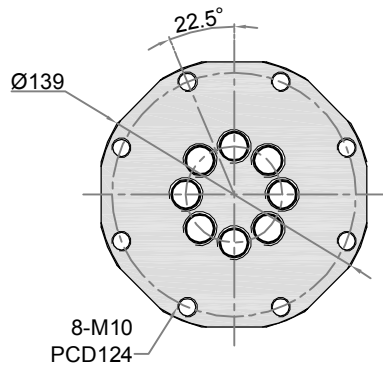

技术参数：  
最高转速：200RPM  
最高温度：185°C  
最大压力：350BAR  
介质：液压油 水

|         |     |          |
|---------|-----|----------|
| Drawn   | JSM | 6/2/03   |
| Checked | PJE | 13/43/05 |
| Checked | PJE | 11/36/08 |

TOLERANCE  
EXCEPT AS NOTED  
x.x ±.125  
x.xx ± 0.15  
x.xxx ± 0.005  
ANGLES ± 0.5°

SHAFT MEL/PLTING:  
CARBON STL  
94-62 RC  
BLK OXIDE

SHAFT MEL/PLTING:  
CARBON STL  
BLK OXIDE

CUSTOMER APPROVAL/DATE:

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO DYNAMIC SEALING TECHNOLOGIES, INC. (HIDNEY). NO REPRODUCTION OR PUBLICATION OF THIS DOCUMENT OR ITS CONTENTS, IN WHOLE OR PART SHALL BE MADE WITHOUT THE WRITTEN CONSENT FROM HIDNEY.

# HIDNEY

深圳市欣德利机电设备有限公司

TEL: 0755-27222664

CUSTOMER:

STOCK

P/N:

REV:

A 4

THIRD ANGLE PROJECTION:

